




1-3 Mm Nickel Cobalt Molybdenum Alumina Hydrogenation Catalyst With 150 M2/G-200 M2/G Surface Area

Our Product Introduction

for more products please visit us on jyalumcatalyst.com

Basic Information

- Place of Origin: CHINA
- Brand Name: Cracked Gasoline Hydrogenation Catalyst
- Model Number: KMH-07

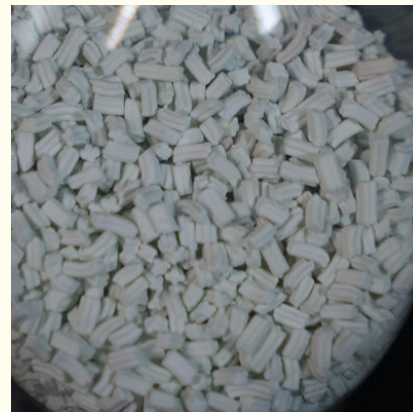

Product Specification

- Composition: Nickel, Cobalt, Molybdenum, Alumina
- Reaction Selectivity: 95-98%
- Shape: Spherical
- Size: 1-3 Mm
- Pore Size: 0.3-0.5 Nm
- Surface Area: 150-200 M2/g
- Bulk Density: 0.7-0.9 G/cm3
- Application: Hydrogenation Of Cracked Gasoline
- Highlight: **nickel cobalt molybdenum,
cobalt molybdenum alumina,
alumina hydrogenation catalyst**

Product Description

Product Description:

Our Cracked Gasoline Hydrogenation Catalyst has a spherical shape and a size of 1-3 mm, making it easy to handle and use in various industrial settings. Additionally, this catalyst has a long lifespan of 2-3 years, providing a durable and cost-effective solution for your hydrogenation processes.

Nickel-based catalysts are widely recognized for their ability to efficiently hydrogenate a variety of compounds, and our Cracked Gasoline Hydrogenation Catalyst is no exception. This catalyst is specifically designed to hydrogenate cracked gasoline, allowing for the removal of impurities and the production of high-quality gasoline for various industrial applications.

Investing in our Cracked Gasoline Hydrogenation Catalyst means investing in a high-quality, reliable, and long-lasting solution for your hydrogenation needs. Trust in the superior composition of Nickel, Cobalt, Molybdenum, and Alumina to provide efficient and effective hydrogenation of your cracked gasoline, resulting in high-quality gasoline for your industrial applications.

Technical Parameters:

Pore Size	0.3-0.5 Nm
Shape	Spherical
Surface Area	150-200 M2/g
Composition	Nickel, Cobalt, Molybdenum, Alumina
Bulk Density	0.7-0.9 G/cm3
Catalyst Life	2-3 Years
Reaction Selectivity	95-98%
Size	1-3 Mm
Application	Hydrogenation Of Cracked Gasoline

Applications:

The Cracked Gasoline Hydrogenation Catalyst is primarily used for the hydrogenation of cracked gasoline. This process is essential for the removal of sulfur, nitrogen, and other impurities from the cracked gasoline. The use of this catalyst ensures that the final product meets the necessary specifications for use in various applications.

The Cracked Gasoline Hydrogenation Catalyst is ideal for use in various industries, including the petroleum industry. This catalyst is suitable for use in the refining and processing of petroleum products, including gasoline, diesel, and jet fuel. It is also essential for the production of various chemicals and plastics.

The Cracked Gasoline Hydrogenation Catalyst is also useful in the production of renewable energy. This catalyst can be used in the hydrogenation of biofuels to produce a cleaner and more efficient fuel source. The use of this catalyst in the production of biofuels ensures that the final product meets the necessary specifications for use in various applications.

The Cracked Gasoline Hydrogenation Catalyst is a versatile catalyst that can be used in various applications. Its ability to remove impurities from cracked gasoline makes it an essential catalyst in the petroleum industry. Its use in the production of renewable energy ensures that it is an environmentally friendly catalyst that can contribute to a sustainable future.

Customization:

Our Product Customization Services for the Cracked Gasoline Hydrogenation Catalyst include:

Brand Name: Cracked Gasoline Hydrogenation Catalyst

Model Number: KMH-07

Place of Origin: CHINA

Reaction Selectivity: 95-98%

Bulk Density: 0.7-0.9 G/cm3

Surface Area: 150-200 M2/g

Pore Size: 0.3-0.5 Nm

Catalyst Life: 2-3 Years

Our one-stage hydrogenation catalyst can be customized to meet your specific needs. The Cracked Gasoline Hydrogenation Catalyst is a high-quality product that is ideal for a variety of applications. Our team of experts can work with you to develop a customized solution that meets your unique requirements.

At our facility in China, we use advanced technologies and processes to produce the highest quality Hydrogenation Catalyst products. Our one-stage hydrogenation catalyst is designed to deliver superior performance and reliability, making it the perfect choice for your needs.

Support and Services:

The Cracked Gasoline Hydrogenation Catalyst product is designed to improve the quality of cracked gasoline by removing impurities and increasing its octane number. Our technical support team is available to assist with any questions or issues related to the product's installation, operation, and maintenance.

In addition, we offer a range of services to ensure optimal performance of the catalyst, including catalyst testing, regeneration, and replacement. Our team of experts can work with you to develop a customized solution that meets your specific needs and helps you achieve your desired results.

Packing and Shipping:

Product Packaging:

The Cracked Gasoline Hydrogenation Catalyst is packed in a high-quality, air-tight container that ensures the product remains in top condition during shipping and storage. The container is made of durable materials that are resistant to damage during transportation.

Shipping:

The Cracked Gasoline Hydrogenation Catalyst will be shipped via a reliable carrier service that guarantees timely delivery. The product is carefully packaged to prevent any damage during transit. Shipping costs may vary depending on the destination and the quantity ordered.



Qingdao Junyao Catalyst New Material Technology Co., Ltd.



+8618254266810



jycat@qdjunyao.com.cn



jyalumcatalyst.com